



C-DE SERIES, DIGITAL COMBINATION CONTROLS						
MODEL NUMBER	VOLTS	MAX. AMPS	REPL. RELAY P/N	REPL. TRANS.	REPL. SENSOR P/N	SHIP WGT. Lbs./kg)
C-DE202	240	20	AHD-20-1	HDD50 2-4/1	RTD1000	16 (7.3)
C-DE204	480	20	AHD-20-1	HDD50 2-4/1	RTD1000	17 (7.7)
C-DE402	240	40	AHD-40-1	HDD50 2-4/1	RTD1000	25 (11.3)
C-DE404	480	40	AHD-40-1	HDD50 2-4/1	RTD1000	33 (15)
C-DE802	240	80	AHD-80-1	HD100 2-4/1	RTD1000	
C-DE804	480	80	AHD-80-1	HD100 2-4/1	RTD1000	
C-DE1252	240	125	AHD-125-1	HDD300 2-4/1	RTD1000	
C-DE1254	480	125	AHD-125-1	HDD300 2-4/1	RTD1000	

Combination control consists of gasketed plastic enclosure, thermostat, 3 pole contactor and transformer.



DE Series, Combination Control Features and Benefits

IMPROVES PROCESS CONTROL:

- ◆ Large (.56" high), easy to read LED display. Provides precise control for consistent plating and etch rates in most aqueous processes.

TEMPERATURE SENSOR:

- ◆ Fluoropolymer (FEP) covered 10-foot (3m), 1000-ohm platinum RTD sensor included standard with the control. Provides extended service in corrosive liquids and can be lengthened with ordinary copper wire.

CORROSION RESISTANT ENCLOSURE:

- ◆ NEMA 1, IP21, flame retardant and gasketed plastic enclosure with stainless steel hardware.

CAPACITIES:

- ◆ Large switching capacities from 20 to 125 amps for up to 600 volts. Larger capacities available, consult factory.
- ◆ Adjustable temperature range from -40°F(-40°C) to 999°F(538°C).
- ◆ ±.25% full span, single digit accuracy.
- ◆ 20°F(-7°C) to 140°F(60°C) ambient temperature range.
- ◆ Single or three phase.
- ◆ Control transformer included.

CERTIFICATIONS: cULus


SAFETY FEATURES:

- ◆ Pre-wired P1 terminal blocks.
- ◆ Non-volatile memory.
- ◆ Programmable high alarm shutdown.
- ◆ Sensor short and break protection.
- ◆ Programmable high set point limit.
- ◆ Security code restricted menu.

OPTIONS AVAILABLE (consult factory):

- ◆ Scalable voltage and current inputs.
- ◆ Three wire 100-ohm RTD sensors.
- ◆ Special sensors required for temperatures above 500°F(260°C).
- ◆ 25-foot (7.6m) and 50-foot (15.2m) sensors.
- ◆ P2, P3 or P8 thermal protection systems.
- ◆ Integrated liquid level control components.
- ◆ Front panel mounted digital timers.
- ◆ Ground fault protection of equipment (GFPE) circuitry.
- ◆ NEMA 4/4X enclosure (with internal heater for outdoor use).

DIMENSIONS

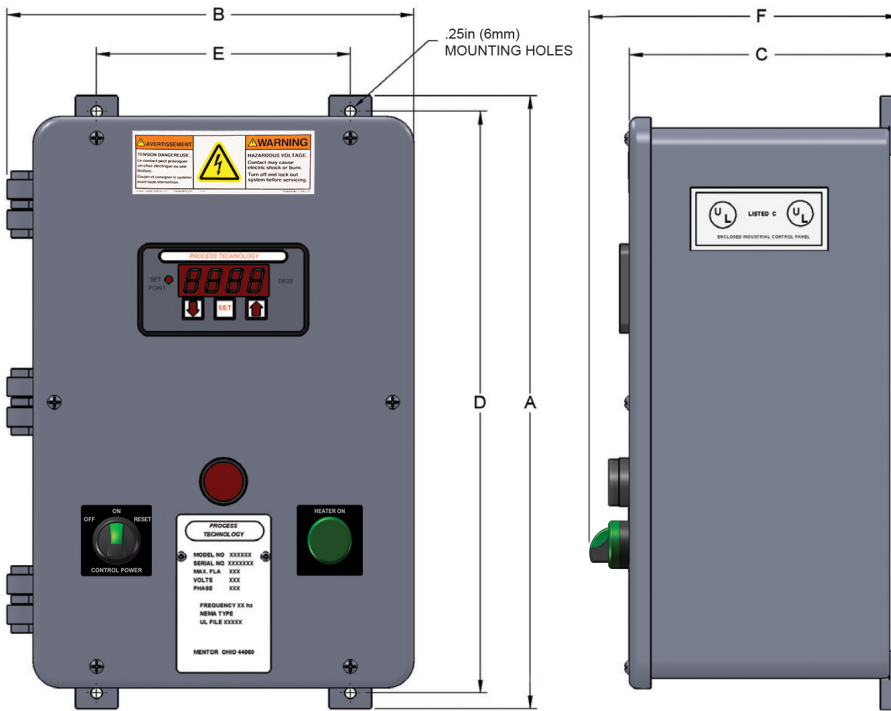

Dimensions	20 - 40 Amps	80 Amps	125 Amps
A	14.375" (365mm)	18" (457mm)	20.25" (514mm)
B	9.63" (245mm)	13.75" (349mm)	15.75" (400mm)
C	6.25" (159mm)	7.625" (194mm)	8.375" (213mm)
D	13.625" (346mm)	17" (432mm)	19.25" (489mm)
E	6" (152mm)	10" (254mm)	12" (305mm)
F	7.03" (175mm)	8.4" (213mm)	9.15" (232mm)

*Box dimensions may vary with options.

DE COMBINATION CONTROL ORDERING INFORMATION

Control Type	Series	Amperes	Voltage	Control Option	Standard Options
C - Combo	DE	20 40 80 125	2 - 240 3 - 380 4 - 480 5 - 415 6 - 600 7 - 400 8 - 208 9 - 220 0 - 200	E = Easyplug -VC = 100 ohm, volt, current board	-R = RTD 100 -L = No sensor -H = High temp sensor -25 = 25 foot RTD sensor -50 = 50 foot RTD sensor -F = FEP sleeved sensor -P2 = thermal protector 2 circuitry -P3 = thermal protector 3 circuitry -P8 = thermal protector 8 circuitry -*LC** = conductive liquid level -*ESP** = capacitive liquid level -D = digital timer -G = ground fault protection -N = NEMA 4X -NH = NEMA 4X with heater

ORDERING EXAMPLE:

C-DE402-P2

DE combination control, 40 amps, 240 volt, P2 thermal protection.

